

# BLORE BOWRON


70 Sandford Lane Industrial Estate, Kennington Oxford, OX1 5RP

Tel: +44 (0)1865 736686

Fax: +44 (0)1865 736678

E-mail: Sales@blorebowron.co.uk

## Chassis Mounting Transformers 6VA to 100VA

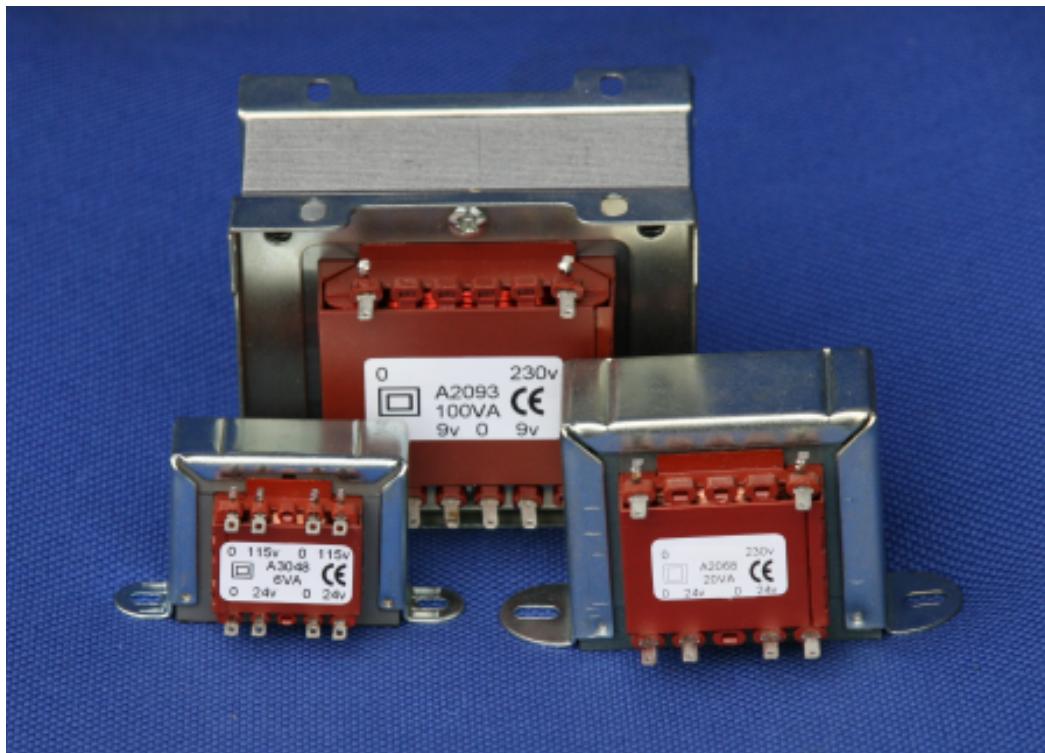

A comprehensive range of Chassis mounting transformers with a choice of single (230v) or dual (115v + 115v) primary windings suitable for 50/60Hz operations and two independent secondary windings suitable for connecting in series, parallel or centre tap, giving a wide range of output voltage and current combinations.

### **Features:**

Designed, manufactured and tested in accordance with, EN60950\* and EN60742\*

Double section metric bobbins constructed with fully shrouded windings.

Flame retardant material to UL94V-0

Fitted with terminations for 'solder' or 'push-on' connections (6va fitted with solder tags only)

'U' clamp style fixing for 6va to 50va, 75va and 100va above fitted with universal multi-hole end frames.

\* Requires additional fuse protection. Please enquire




# **Chassis Mounting Transformers 6VA to 200VA**


Primary 230v			Primary 2 x 115v		
VA	Secondary (v)	Part No	VA	Secondary (v)	Part No
6VA	4.5 + 4.5	A4040	6VA	4.5 + 4.5	A5040
	6 + 6	A4041		6 + 6	A5041
	7.5 + 7.5	A4042		7.5 + 7.5	A5042
	9 + 9	A4043		9 + 9	A5043
	12 + 12	A4044		12 + 12	A5044
	15 + 15	A4045		15 + 15	A5045
	18 + 18	A4046		18 + 18	A5046
	20 + 20	A4047		20 + 20	A5047
	24 + 24	A4048		24 + 24	A5048
12VA			12VA		
	6 + 6	A2051		6 + 6	A3051
	7.5 + 7.5	A2052		7.5 + 7.5	A3052
	9 + 9	A2053		9 + 9	A3053
	12 + 12	A2054		12 + 12	A3054
	15 + 15	A2055		15 + 15	A3055
	18 + 18	A2056		18 + 18	A3056
	20 + 20	A2057		20 + 20	A3057
	24 + 24	A2058		24 + 24	A3058
20VA			20VA		
	6 + 6	A2061		6 + 6	A3061
	7.5 + 7.5	A2062		7.5 + 7.5	A3062
	9 + 9	A2063		9 + 9	A3063
	12 + 12	A2064		12 + 12	A3064
	15 + 15	A2065		15 + 15	A3065
	18 + 18	A2066		18 + 18	A3066
	20 + 20	A2067		20 + 20	A3067
	24 + 24	A2068		24 + 24	A3068
50VA			50VA		
	6 + 6	A2071		6 + 6	A3071
	7.5 + 7.5	A2072		7.5 + 7.5	A3072
	9 + 9	A2073		9 + 9	A3073
	12 + 12	A2074		12 + 12	A3074
	15 + 15	A2075		15 + 15	A3075
	18 + 18	A2076		18 + 18	A3076
	20 + 20	A2077		20 + 20	A3077
	24 + 24	A2078		24 + 24	A3078
75VA			75VA		
	6 + 6	A2081		6 + 6	A3081
	7.5 + 7.5	A2082		7.5 + 7.5	A3082
	9 + 9	A2083		9 + 9	A3083
	12 + 12	A2084		12 + 12	A3084
	15 + 15	A2085		15 + 15	A3085
	18 + 18	A2086		18 + 18	A3086
	20 + 20	A2087		20 + 20	A3087
	24 + 24	A2088		24 + 24	A3088
	50 + 50	A2089		50 + 50	A3089
100VA			100VA		
	6 + 6	A291		6 + 6	A391
	7.5 + 7.5	A2092		7.5 + 7.5	A3092
	9 + 9	A2093		9 + 9	A3093
	12 + 12	A2094		12 + 12	A3094
	15 + 15	A2095		15 + 15	A3095
	18 + 18	A2096		18 + 18	A3096
	20 + 20	A2097		20 + 20	A3097
	24 + 24	A2098		24 + 24	A3098
	50 + 50	A2099		50 + 50	A3099

## **Chassis Mounting Transformers 6VA to 100VA**


**6VA**

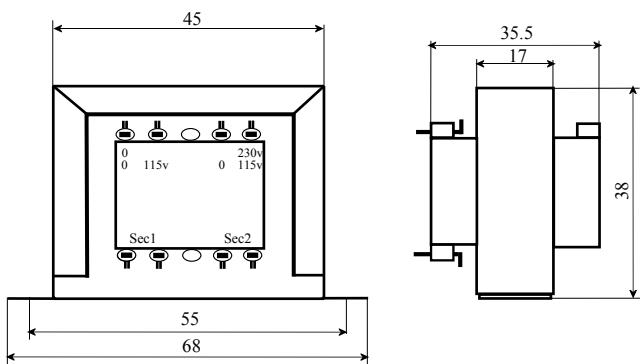


**12VA**

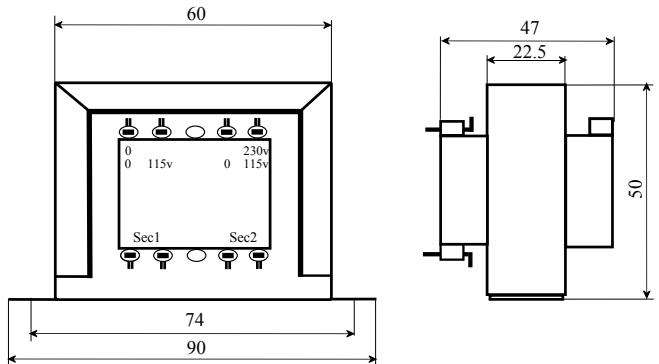


**20VA**

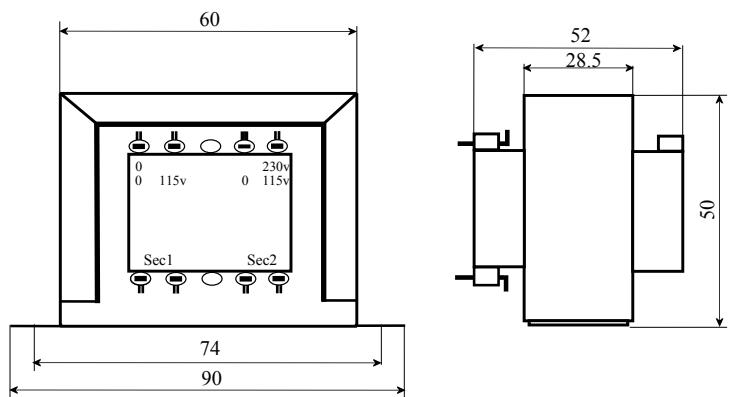

**50VA**

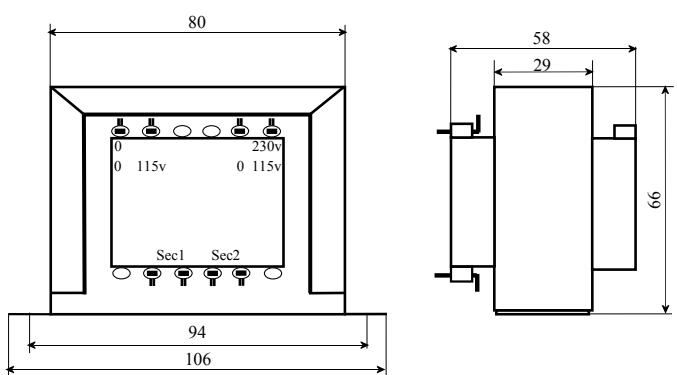

**75VA**

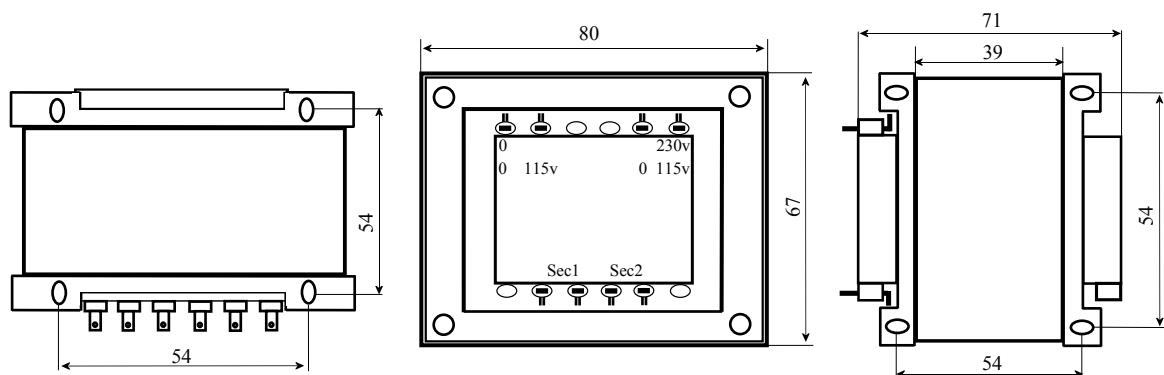

**100VA**

