


Tolerance on all dimensions in millimetres: +/- 0.1mm unless stated otherwise.
 Inches shown in brackets. Tolerance on dimensions in inches: +/- 0.005"
 Pin size: 0.7mm (0.0276")

Electrical characteristics:

Turns ratio: 1+1:4+4
 Impedance ratio:
 Primary 150 ohms parallel / 600 ohms series connected
 Secondary: 2.5k ohms parallel / 10k ohms series connected






DC resistance (+/- 15%):
 Primary total: 20.6 ohms
 Secondary total: 474 ohms
 Inductance, measured at 1kHz, 0.27V:
 Primaries 125mH min. per winding
 Secondaries: 3.6H min. per winding
 Proof voltage: primaries to secondaries: 1kV DC
 Power: 100mW @ 300Hz and 1mW @ 30Hz

Operating temperature range: 0 to +70°C
 Storage temperature range: -25°C to + 120°C
N.B. Do not pass DC through windings



Unit 5, Oxonian Park, Langford Locks,
 Kidlington, Oxfordshire. OX5 1FP
 Tel: (01865) 855085 Fax: (01865) 855075
 Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A47E page 1 of 2	1	20/01/10	CS		A262A47E
	2	07/06/10	CS		
Scale: nts					
All dimensions in mm unless stated otherwise					

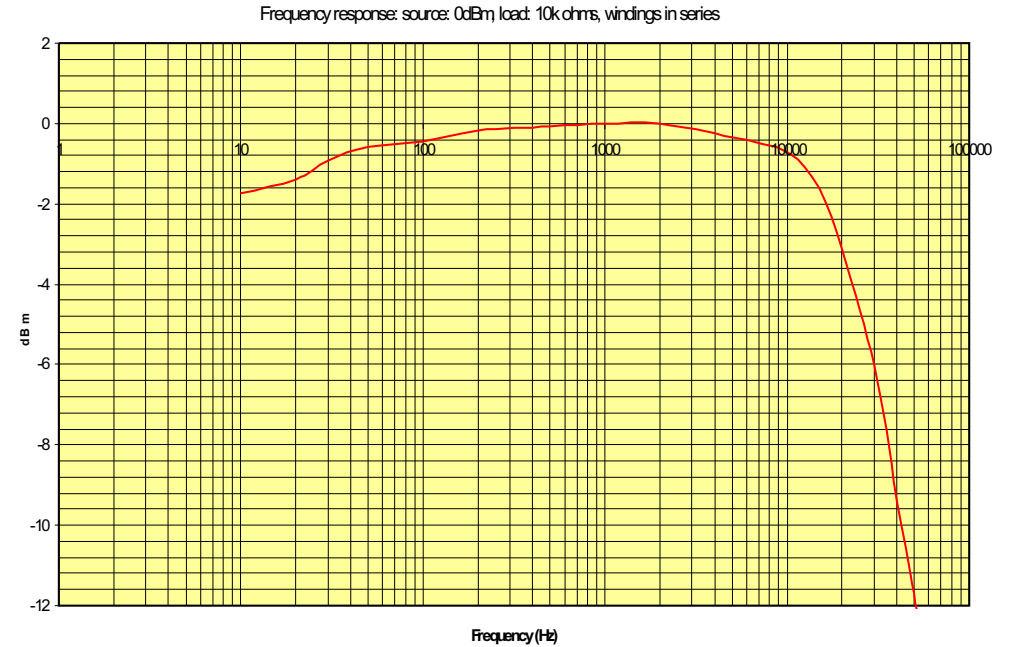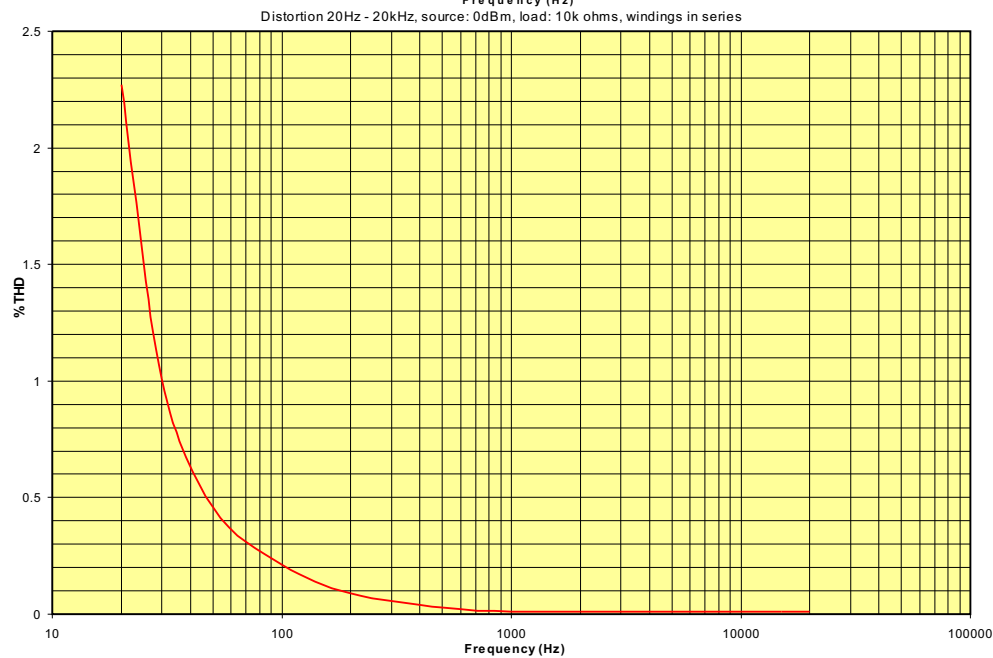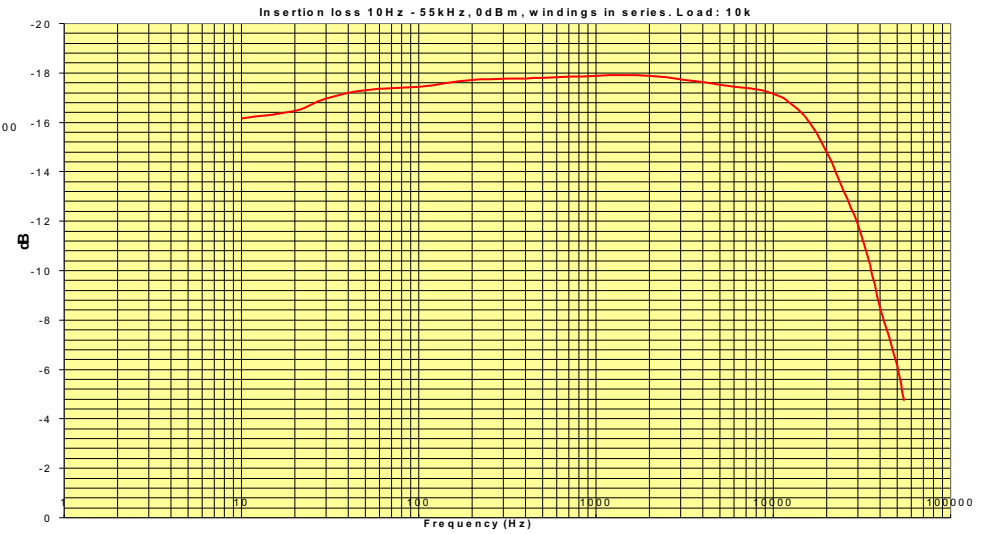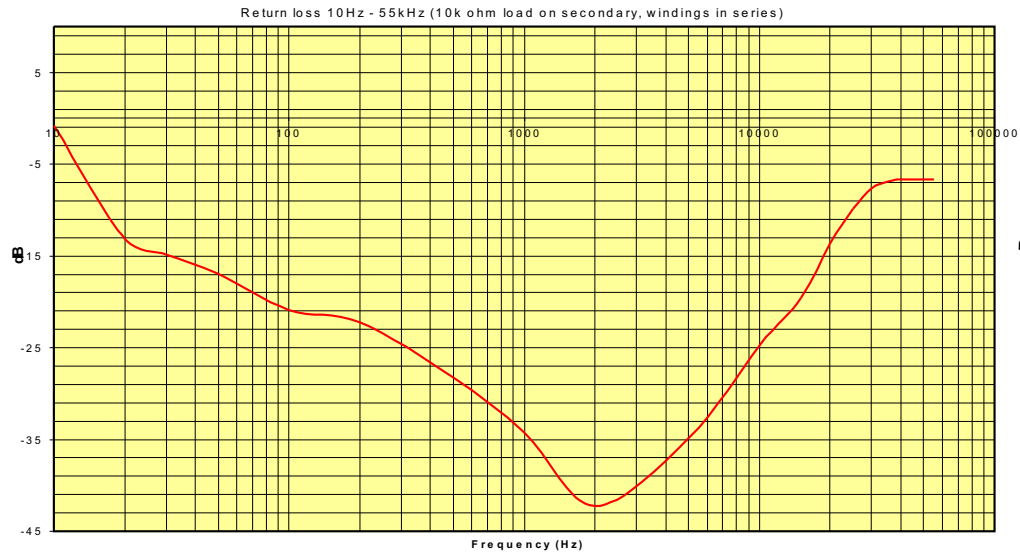

Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 855085 Fax: (01865) 855075
Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A47E page 2 of 2	1	20/01/10	CS		A262A47E
	2	07/06/10	CS		
Scale: nts					
All dimensions in mm unless stated otherwise					