


Electrical characteristics:

Winding ratio: 1+1:1+1
 Primary impedance: 2.5k ohms parallel / 10k series
 DC resistance (+/- 15%):
 Primaries total: 424 ohms
 Secondaries total: 464 ohms
 Inductance, measured at 1kHz, 0.27V: 3.2H min. per winding
 Primary leakage inductance*: 14mH 1kHz
 Interwinding capacitance* (@ 20kHz):
 primary to secondary: 37pF typical
 Primary to screen: 71pF typical
 Secondary to screen: 64pF typical
 * primaries in parallel and secondaries in parallel
 Power: 100mW @ 300Hz,
 2.5mW @ 50Hz,
 1mW @ 30Hz
 Proof voltage: primaries to secondaries: 1kV DC
 windings to screen: 1kV DC


Operating temperature range: 0 to +70°C
 Storage temperature range: -25°C to + 120°C
N.B. Do not pass DC through windings




Unit 5, Oxonian Park, Langford Locks,
 Kidlington, Oxfordshire. OX5 1FP
 Tel: (01865) 855085 Fax: (01865) 855075
 Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A8E page 1 of 3	1	04/10/04	CS		A262A8E
	3	07/06/10	CS		
	4	12/12/13	CS		
	5	03/09/18	CS		
	Scale: nts	All dimensions in mm unless stated otherwise			


Frequency response: secondary loaded with 9k7

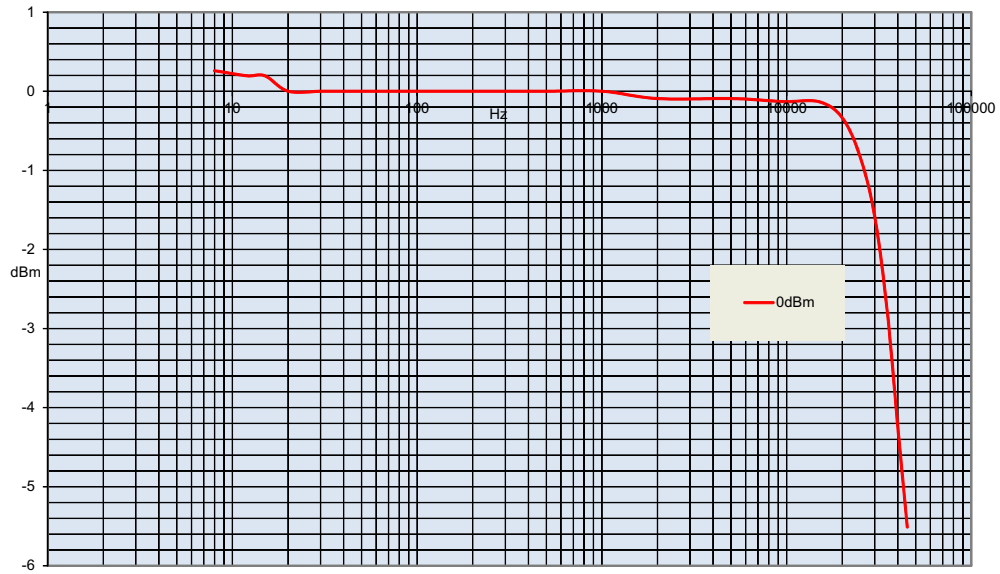



Distortion v frequency: secondary loaded with 9k7

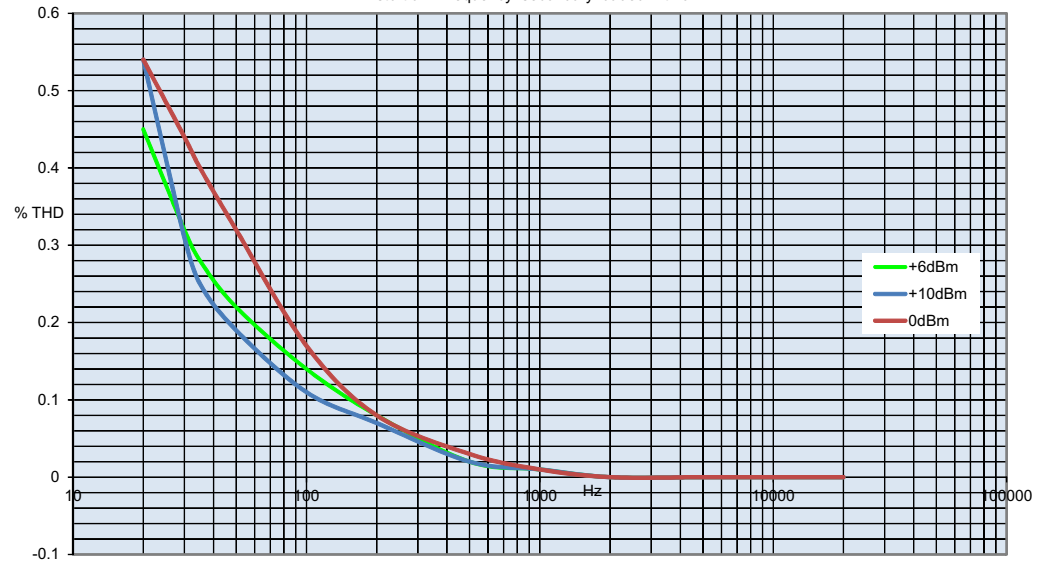

Distortion v input level @ fixed frequencies: secondary loaded with 9k7

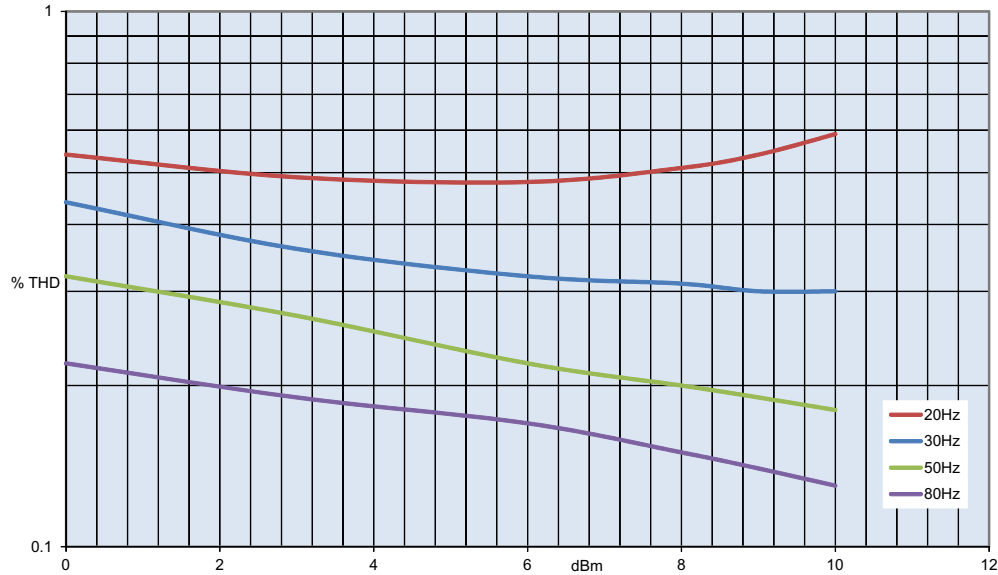

Open circuit inductance v frequency



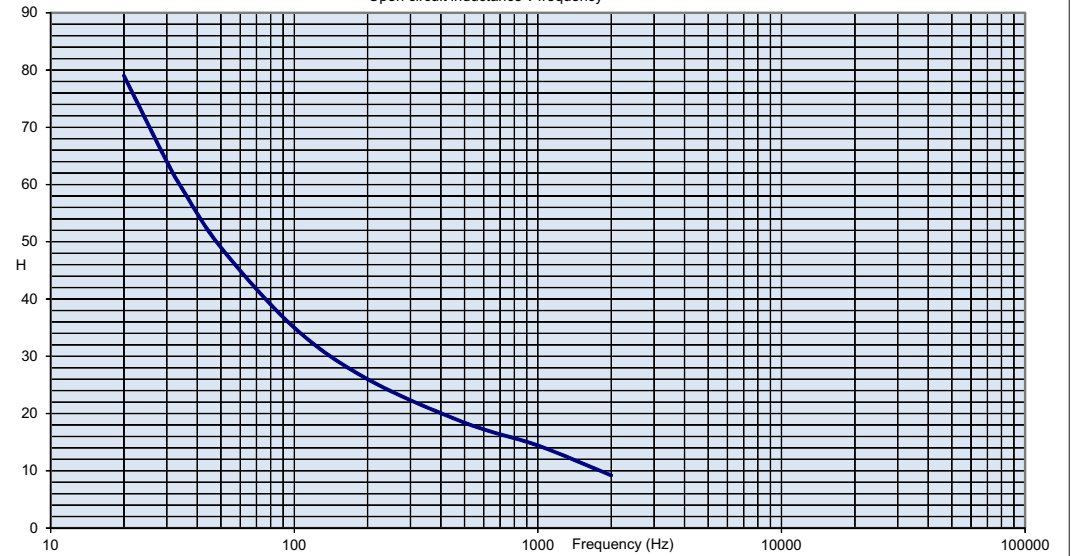


Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 855085 Fax: (01865) 855075
Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A8E page 2 of 3	1	04/10/04	CS		A262A8E
	3	07/06/10	CS		
	4	12/12/13	CS		
	5	03/09/18	CS		

Scale: nts

All dimensions in mm unless stated otherwise

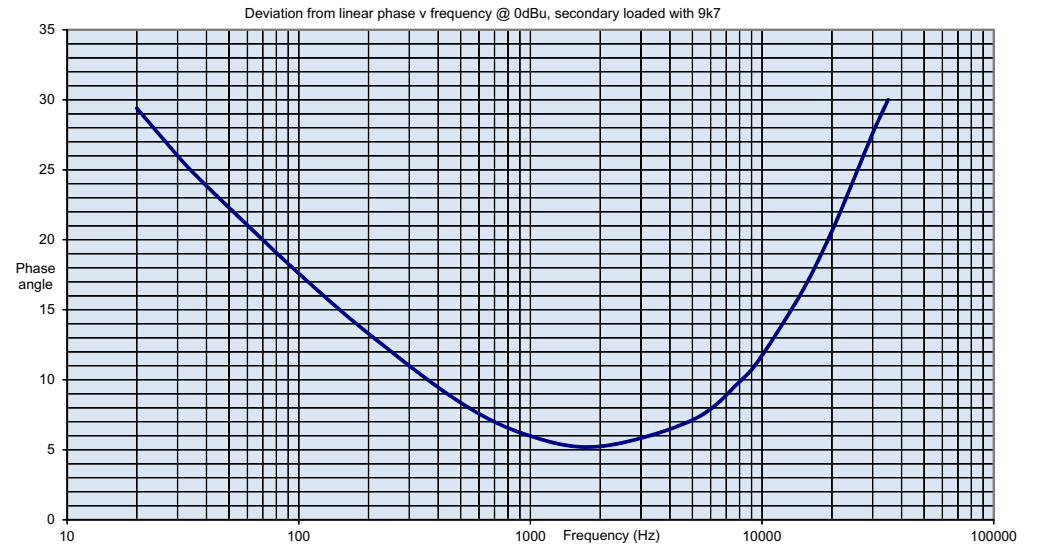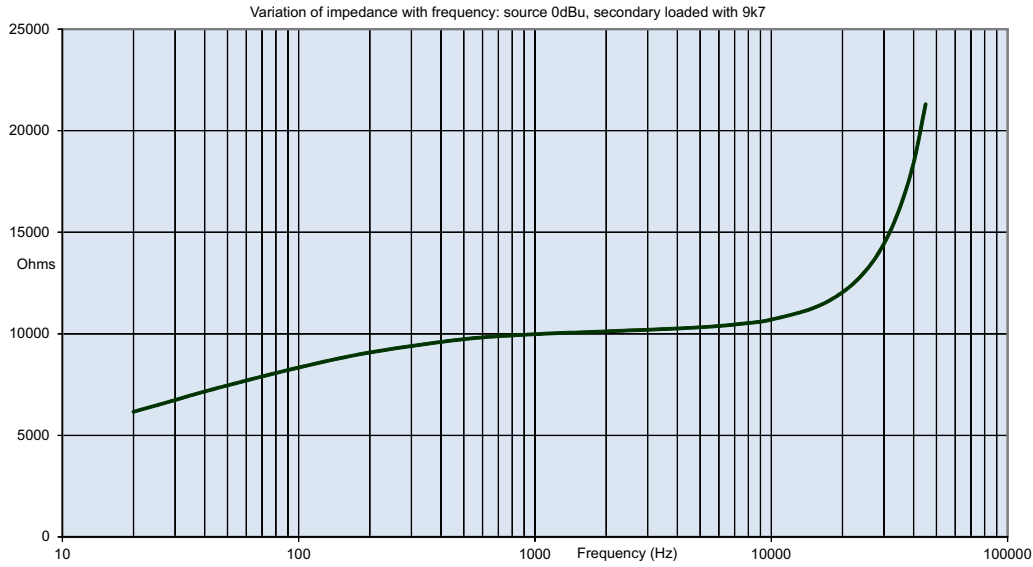

Unit 5, Oxonian Park, Langford Locks,
Kidlington, Oxfordshire. OX5 1FP
Tel: (01865) 855085 Fax: (01865) 855075
Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A8E page 3 of 3	1	04/10/04	CS		A262A8E
	3	07/06/10	CS		
	4	12/12/13	CS		
	5	03/09/18	CS		
	Scale: nts	All dimensions in mm unless stated otherwise			